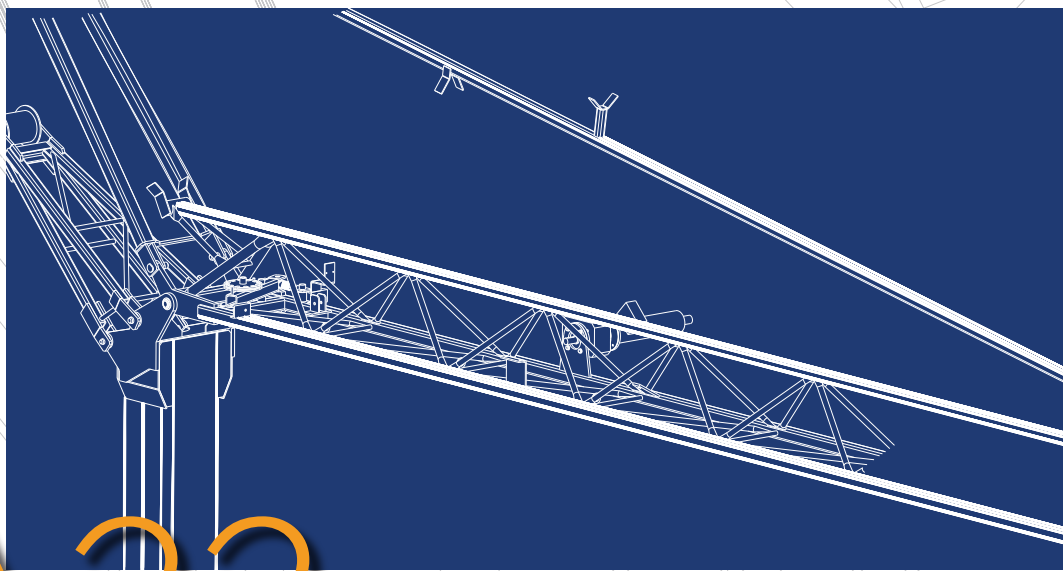


ENG

— CRANES —

Design, engineering, manufacture

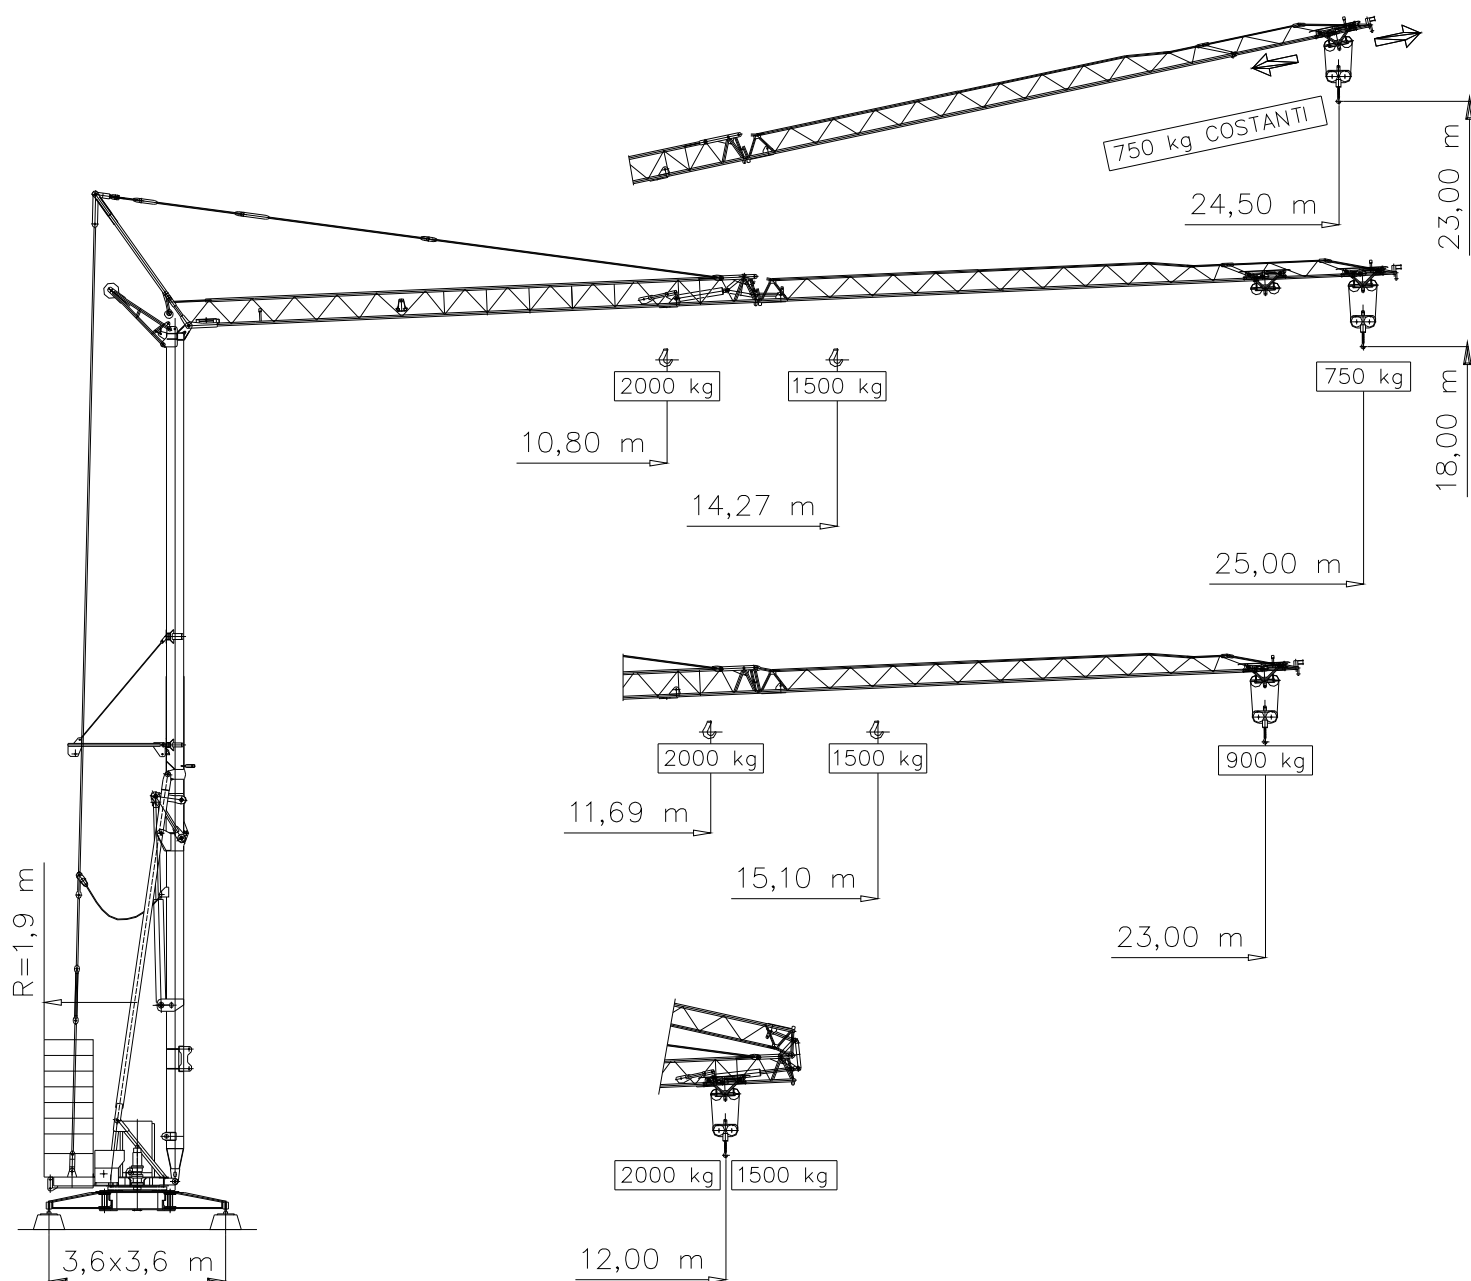


GTA22

2,0t


—
—
2018



CE EN14439-C25





Courbes de charges - Lastkurven - Load curves - Curve di carico



P. Max. 1500 kg


25 m			14,27	15	17	19	21	23	25	m
			1500	1415	1230	1085	970	870	750	kg

23 m			15,1	17	19	21	23	m
			1500	1310	1160	1035	900	kg

P. Max. 2000 kg

25 m			10,8	13	15	17	19	21	23	25	m
			2000	1640	1415	1230	1085	970	870	750	kg

23 m			11,7	13	15	17	19	21	23	m
			2000	1770	1600	1310	1160	1035	900	kg

12 m	
------	---

1500 - 2000 kg - cost.



Flèche relevée - Ausleger in Steinstellung
Luffing jib - Braccio impennato

750 kg - cost.

Mécanismes - Antriebe





Mechanisms - Meccanismi

Gru a comandi totalmente elettronici

Levage - Heben Hoisting - Sollevamento	
Distribution - Katzfahren Trolleying - Carrello	
Orientation - Schwenken Slewing - Rotazione	

m/min	kg	CV-PS hp	kw
Da 0 a 36	1500	7	5,14
Da 0 a 30		2	1,5
Da 0 a 1 rpm - g/min		2,5 daNm	

Gru a comandi elettromeccanici

Levage Heben Hoisting Sollevamento			9	1500	2,5	1,83
			36	1000	7	5,14
			4,5	2000	2,5	1,83
			18	2000	10	7,35
			36	1000	10	7,35
Distribution - Katzfahren Trolleying - Carrello			30		2	1,5
Orientation - Schwenken Slewing - Rotazione			0,2-1 rpm - g/min		2,5 daNm	

Puissance électrique nécessaire - Anschlusswert
Necessary electric power
Potenza elettrica necessaria

380 V/50 Hz
220 V/60 Hz


Réseau - Netzstrom
Mains supply - Potenza

10 kw 15 kw

Groupe électrogène
Stromaggregat - Generator set
Gruppo elettrogeno

Nous consulter
Auf Anfrage - Consult us
Consultarci

Réactions - Eckdrucke - Reactions - Reazioni

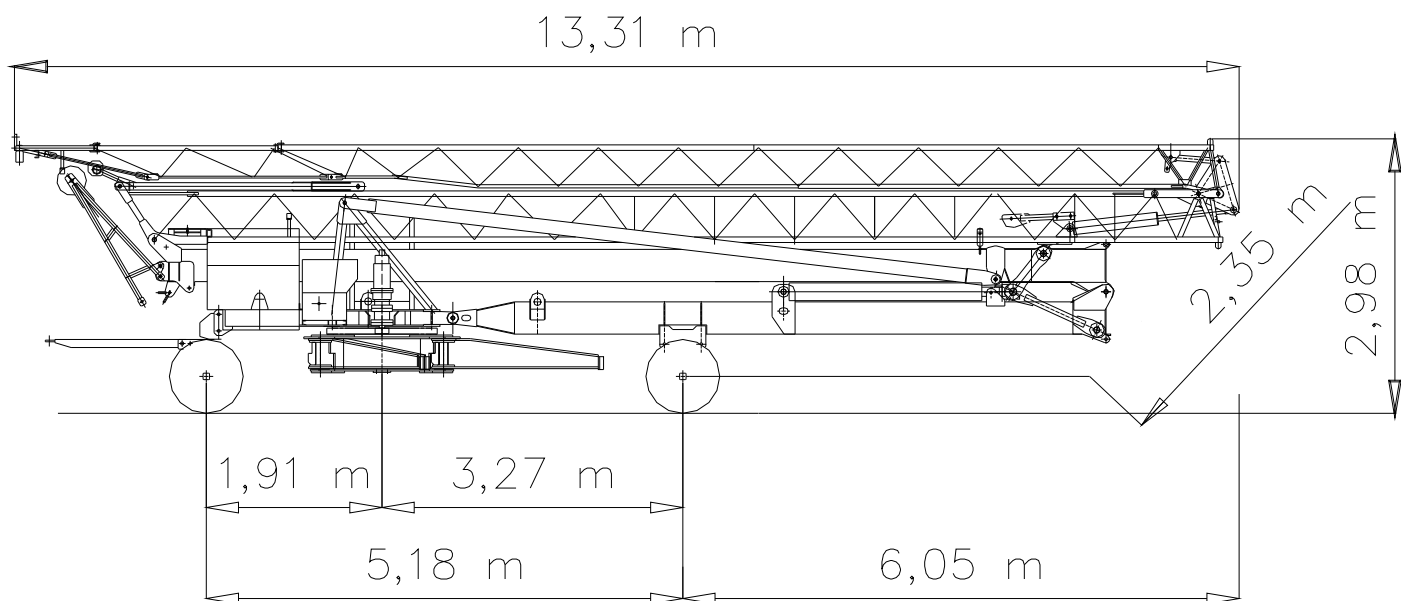


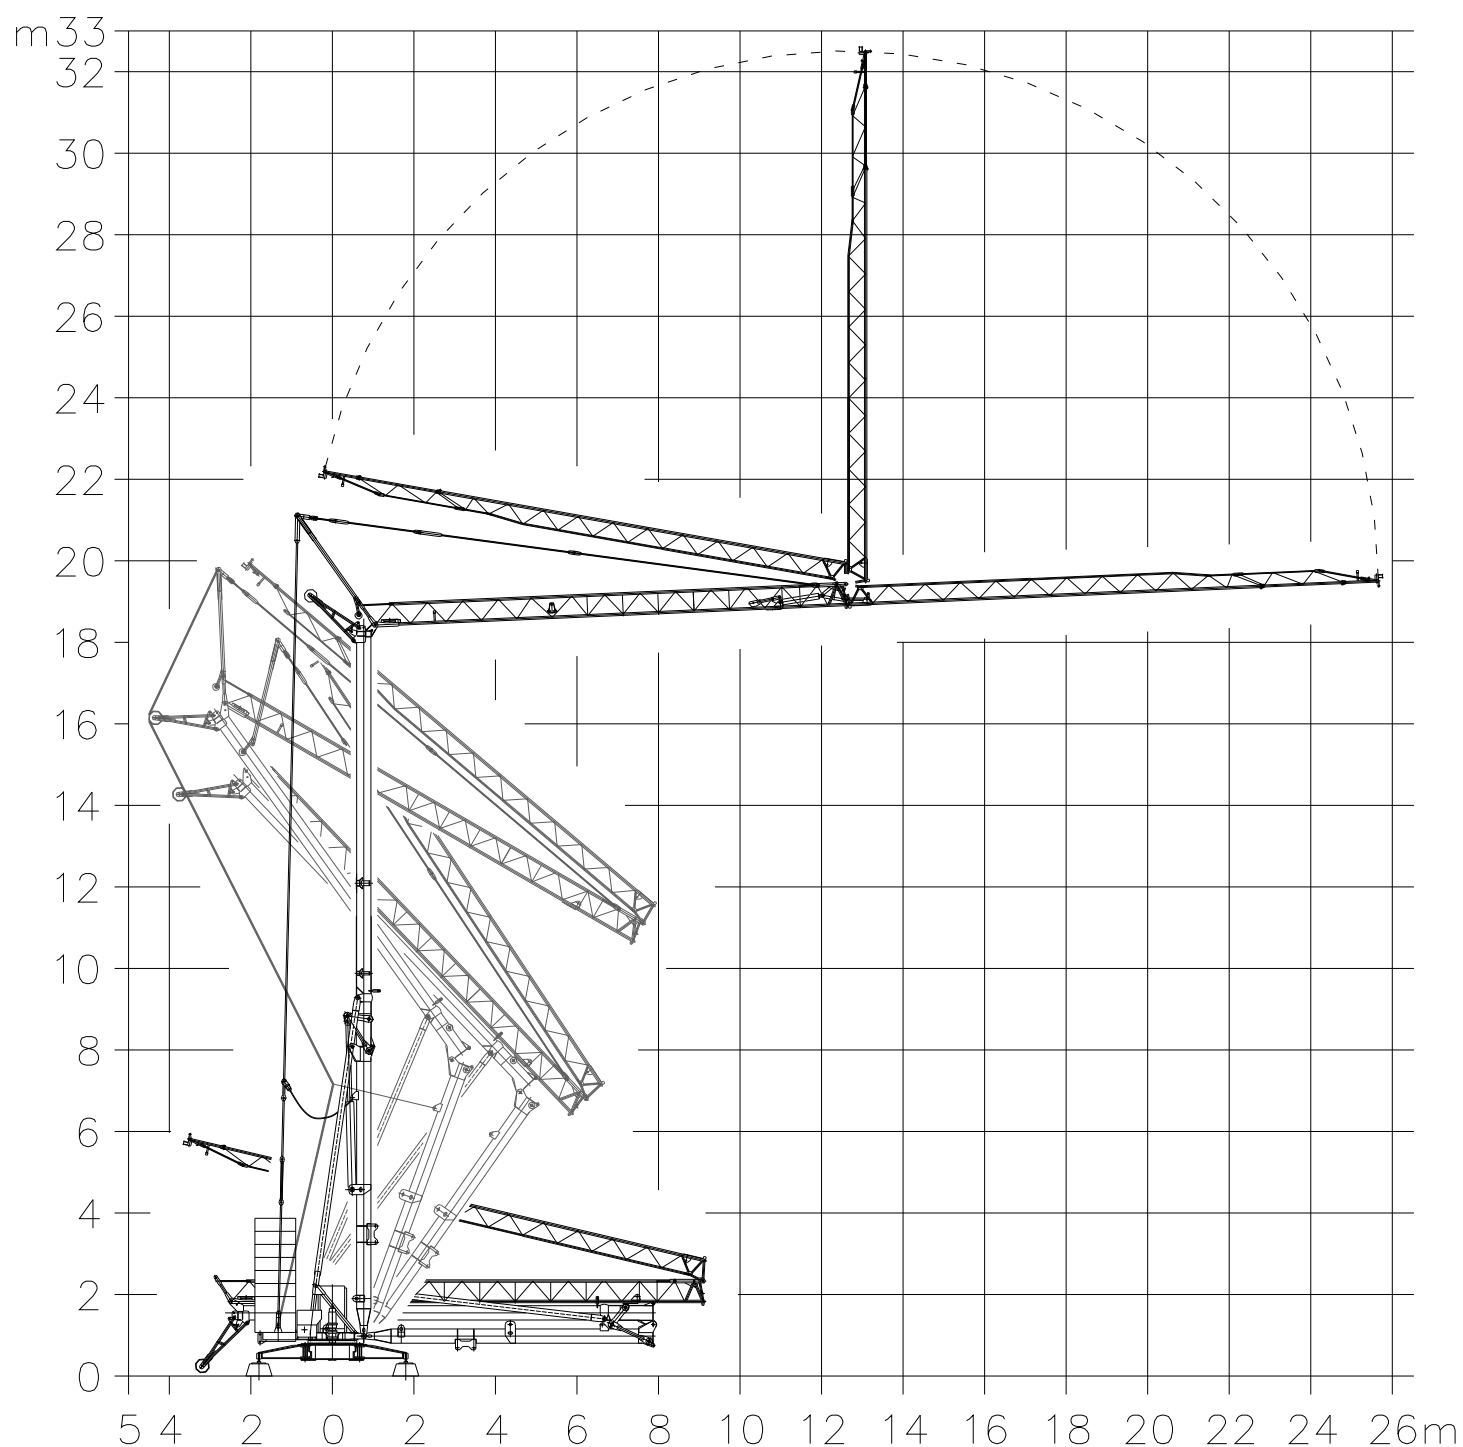
R ● 13000 daN ■ 9500 daN

● En service	● In Betrieb	● In service	● In servizio
■ Pas en service	■ Ausser Betrieb	■ Out of service	■ Fuori servizio

Poids de construction sans essieux - Konstruktionsgewicht ohne T Dead weight without transport axles - Peso della gru senza assali	ransportachse	8100 kg
Poids du lest - Ballastgewicht - Ballast weight - Peso zavorra rotante		13400 kg

Mode de transport - T ransportart - Kind of transport - Soluzione di traino







Design, engineering, manufacture

Edition 2018 - Rev 00

ENG CRANES SRL

Via Limido 1/E
42024 Castelnovo di Sotto - RE
Italy

Info + 39 0522 1495518

Fax + 39 0522 1495601

commerciale@engcranes.com

www.engcranes.com

Specifications and data not binding subject to modification without notice.
Dati illustrativi non impegnativi con riserva di modifica senza preavviso.
Données techniques seulement indicatives modifications réservées sans préavis.
Angaben und Beschreibungen unverbindlich Änderungen vorbehalten ohne weitere Mitteilung.